

## MAIN SWINGING HOSE REEL

made from stainless steel and hinge-mounted at the bottom-rear of the tank.

Hydraulically adjustable over a 170° angle and held pneumatically in the various positions.

Drip pan with drain valve positioned underneath the hose reel.


Hydraulically driven hose winding and unwinding.

Winding and unwinding speed adjustment.

Automatic hose guide.

Stainless steel swivel joint.

High pressure hose available in various models for cleaning and unblocking drains.

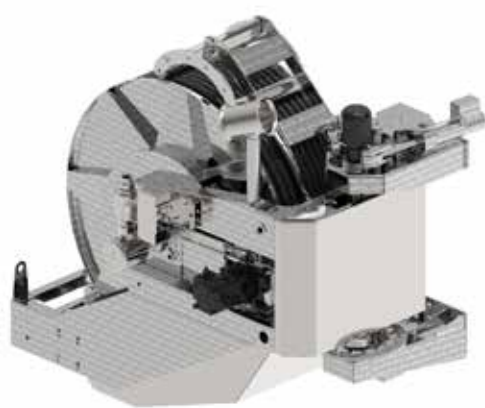

Cappellotto S.p.A.

Sede operativa: Via Vizza, 8 - 31018 Gaiarine (TV) Italy - Sede legale: Via Malignani, 2N - 33074 Fontanafredda (PN) - Italy

Tel. +39.0434.757575 - Fax +39.0434.75.8555 - [info@cappellotto.com](mailto:info@cappellotto.com) - [www.cappellotto.com](http://www.cappellotto.com)

C.F. e P.IVA 00566140265 - Cap. Soc. int. vers. euro 500.000 - C.C.I.A.A. 81648 (PN) - [cappellotto@pec.it](mailto:cappellotto@pec.it)